



PN SERIES: PN400 COLUMN MOUNTED



MAX GROSS
CAPACITY
UP TO 570 kg

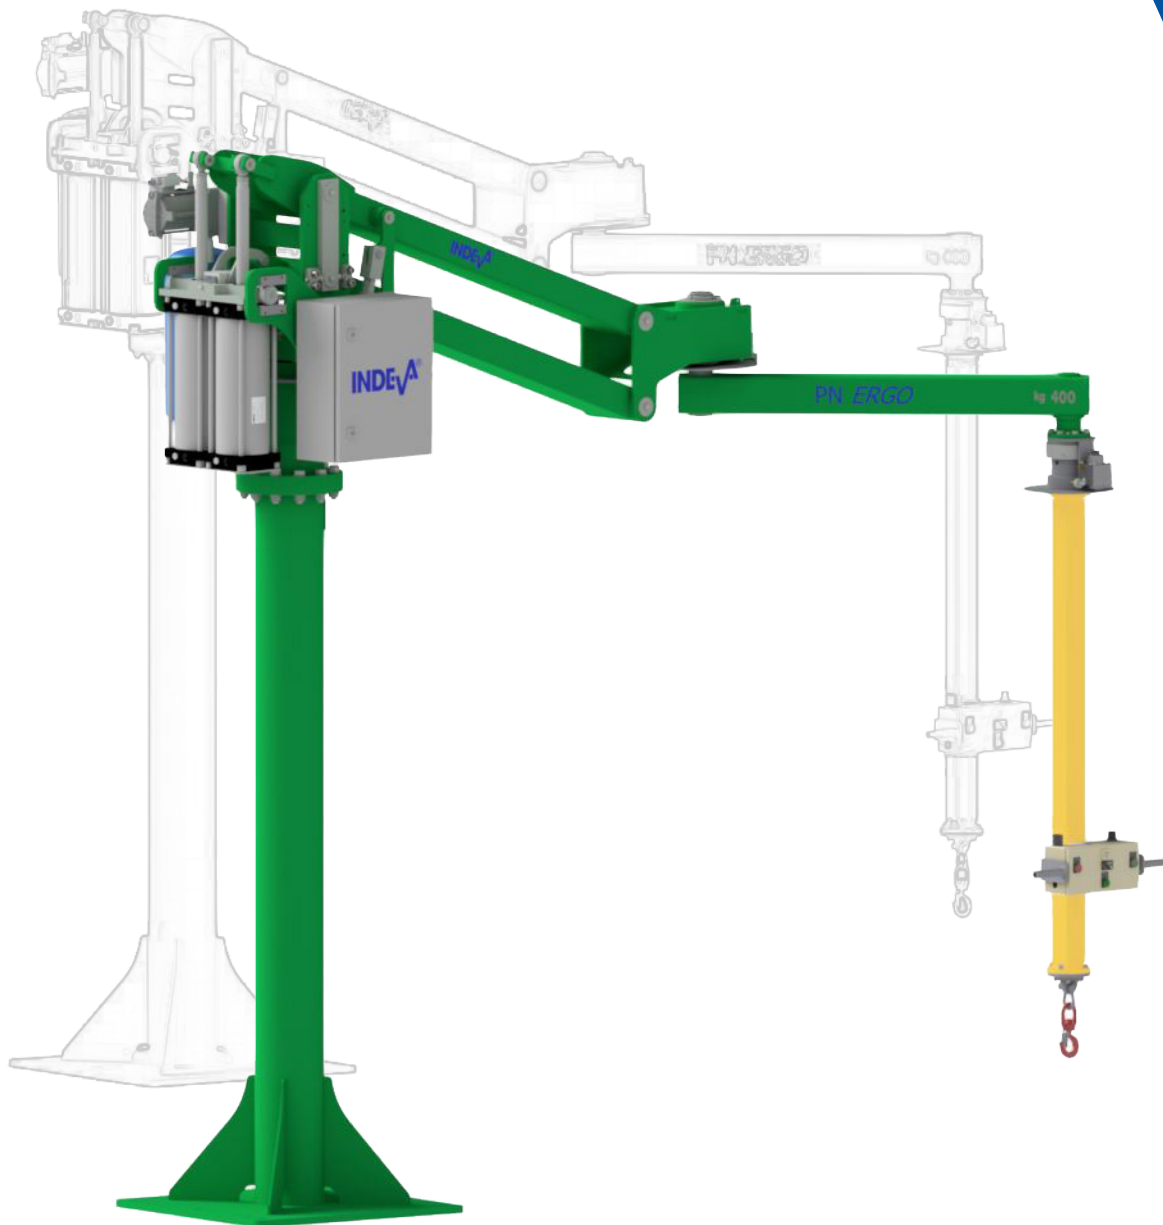

VERTICAL
STROKE
MAX 2.33 m



OFF-SET
LOADS

INDEVA[®]

INTELLIGENT DEVICES FOR HANDLING

PN SERIES: PN400 COLUMN MOUNTED

Model		PN400C				
Type		XS*	S	M	L	XL**
SQ⁽¹⁾ (Max Load capacity)	kg	570	530	400	310	235
Min Load capacity	kg	15	15	15	15	15
Misaligned loads	-	YES	YES	YES	YES	YES
LP	mm	1000	1250	1500	1750	2000
L1	mm	1345	1595	1845	2095	2345
L2*	mm	655	905	1155	1405	1655
R1*	mm	2000	2500	3000	3500	4000
R2*	mm	932	1058	1194	1337	1485
R3*	mm	1812	2265	2718	3172	3625
A⁽²⁾	mm	3568	3813	4160	4405	4751
B⁽²⁾	mm	3130	3230	3430	3530	3730
C⁽²⁾	mm	2000	2100	2300	2400	2600
D Vertical stroke	mm	1167	1458	1750	2042	2333
E⁽²⁾	mm	2010	1962	2017	1970	2025
Weight (with column and load)	kg	1335	1320	1220	1160	1115
Fv max⁽³⁾	daN	1525	1510	1400	1320	1270
Mges max⁽³⁾	daNm	1585	1890	1850	1820	1770



(1) Maximum load capacity SQ on the hook with standard tooling and with a compressed air supply of minimum 0.65 MPa (6.5 bar).

(2) Within certain limits, these values can be modified to suit specific requirements.

(3) Values including the relevant safety factor, according to UNI EN 13001.

* Hoist mode only

** Subject to approval by our engineers

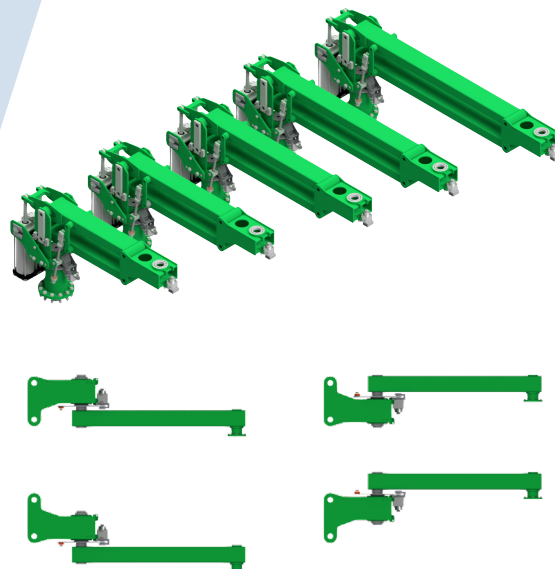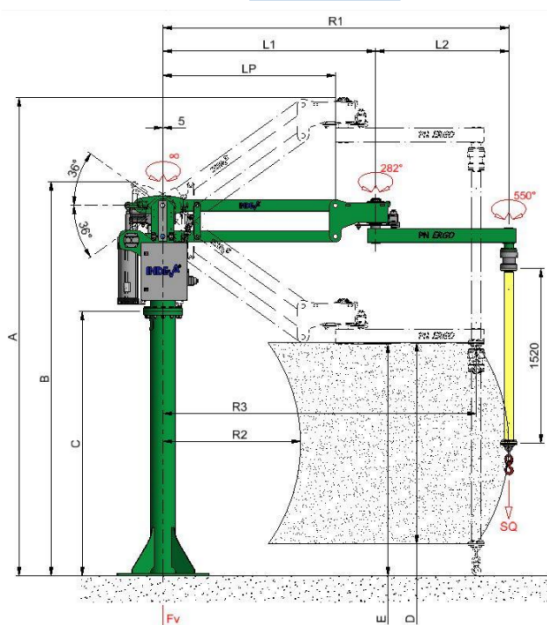

GENERAL SPECIFICATIONS

- Air pressure 0,65 MPa (6,5 bar)
- Noise level < 70 dB(A)
- Lifting speed max 30 m/min
- Main joint axis brake
- Middle joint axis brake
- Continuous rotation on main joint
- Tool axis rotation 550°
- Slow descent in case of pressure failure

- Load balancing: standard, 1 load preset
- Flow rate during the lifting phase: 1300 NI/min
- Compressed air consumption: 118,7 NI for one complete stroke at maximum load
- Base plate size: 800 mm x 800 mm
- Colors: green - RAL 6018; yellow - RAL 1018
- Floor levelling required: ± 2 mm/m

Due to continuous product improvement, these specifications may change without notice.

This document is property of INDEVA S.p.A.; any partial or full reproduction without written authorization by the owner is prohibited.

Compliance with the following directives:

- Essential safety requirements provided by Directive 2006/42/EC;
- Electrical Equipment - Electromagnetic Compatibility (EMC) Directive 2014/30/EU.

AVAILABLE OPTIONS

- Brake for up/down movement
- Pression booster
- Special painting
- Steel platform
- Lifting height limiter stop
- Main joint rotation block
- Middle joint rotation block
- Top joint brake
- Working area sensor on main and middle joint
- Continuous swivel joint on top joint
- Load balancing: adjustment system for different load weights

WORKING ENVIRONMENT REQUIREMENTS


- **Relative humidity rate:** from 30% to 90% \pm 5%
- **Working temperature** 5 to 50 °C
- **Working environment:** the system must be located indoor away from outdoor elements

SAFETIES

(when assembled with tooling)

- Load loss detection;
- The system generates warning (without stopping the balancer) in order to show "out of range" working situations;
- Limitation system for the up / down lifting speed

CONFIGURATION CHART

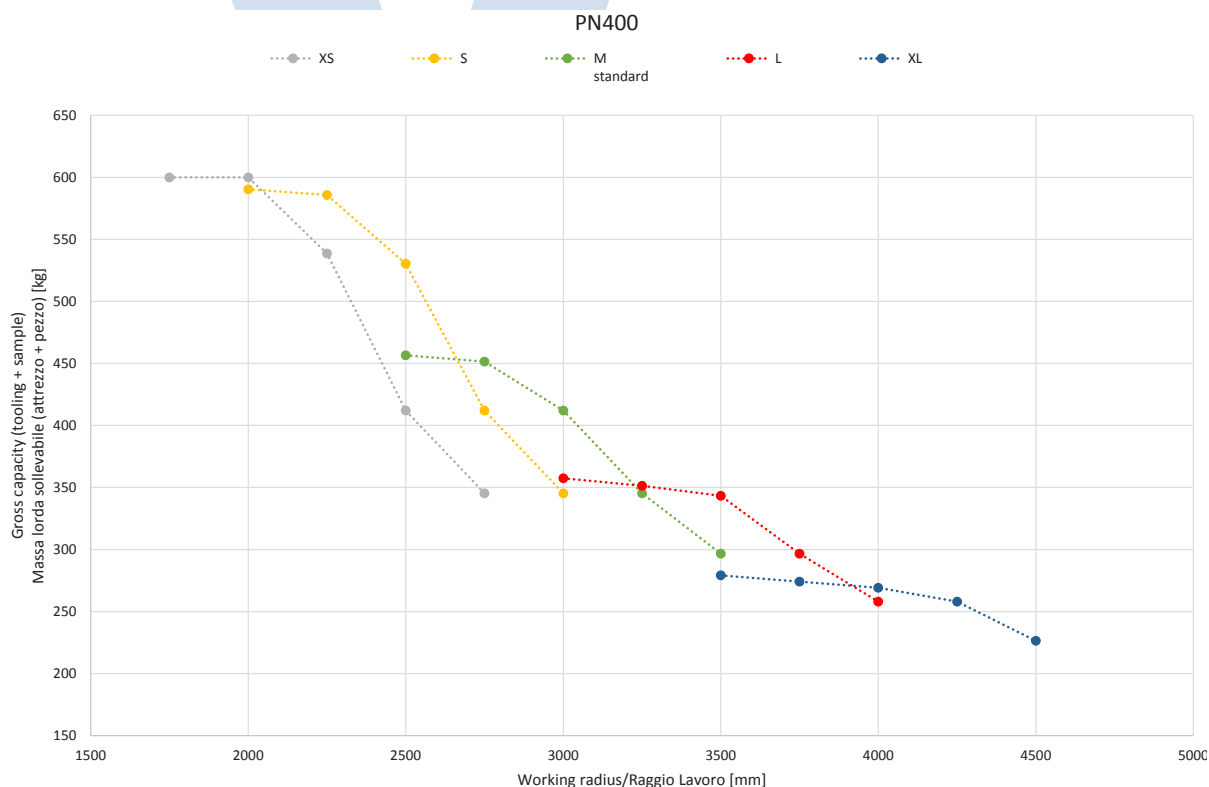

Due to continuous product improvement, these specifications may change without notice.

This document is property of INDEVA S.p.A.; any partial or full reproduction without written authorization by the owner is prohibited.